RLS Room Code: **PTB-E-ACU**

Room Name: **PATIENT BAY - EMERGENCY, ACUTE TREATMENT**

1:25   1.25m   1   0.75   0.5   0.25   0

1:50   2.5m   2   1.5   1   0.5   0
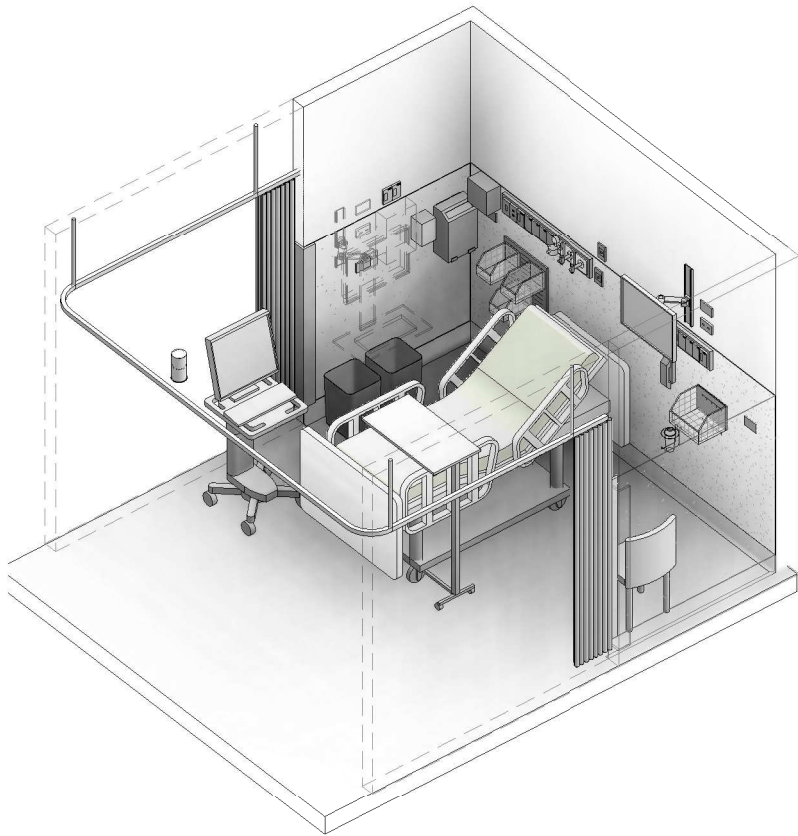
CODE	DESCRIPTION
ELGP-101.01	GPO: single, wall mounted, horizontal
ELGP-131.01	GPO: single, emergency power, wall mounted, horizontal
ELGP-146	GPO: single, emergency power, on service panel
ELGP-201.01	GPO: double, wall mounted, horizontal
ELGP-231.01	GPO: double, emergency power, wall mounted, horizontal
ELPR-071	RCD: residual current device, wall mounted
ELPR-081	RCD: residual current device, emergency power, wall mounted
ELPR-083	RCD: residual current device, emergency power, on services panel
ELSW-001	SWITCH: light
FIDI-106	DISPENSER: PPE, disposable gloves, wall mounted
FIDI-241	DISPENSER: alcohol-based hand rub, wall mounted
FIHR-101	BRACKET: suction bottle, wall mounted
FIHR-110	BRACKET: sharps bin, wall mounted
FIHR-151	PANEL: storage baskets, wall mounted
FIHR-161	BRACKET: wire storage basket, wall mounted
FIHR-297	BRACKET: combined screen all-in-one computer, keyboard and mouse, height adjustable, wall mounted
FIHR-408	BRACKET: patient monitor, articulated, wall mounted
FIRT-051.03	TRACK: curtain, privacy, U-shaped
FLSK-021	SKIRTING: vinyl, integral with floor vinyl, coved
FLVY-101	FLOOR FINISH: vinyl, seamless, standard slip resistance
FQBS-101	CHAIR: visitor, clinical areas
FQGE-101	CURTAIN: privacy screen
FQGE-112	BASKET: storage, for wall mounted panel, small
FQGE-113	BASKET: storage, for wall mounted panel, medium
FQTA-091	TABLE: overbed, mobile, height adjustable
FQWS-003	BIN: sharps, clinical, medium
FQWS-051	BIN: general waste, 20L
FQWS-231	BIN: clinical waste, 20L
ITCL-111	LIGHT: nurse call indicator, ceiling mounted

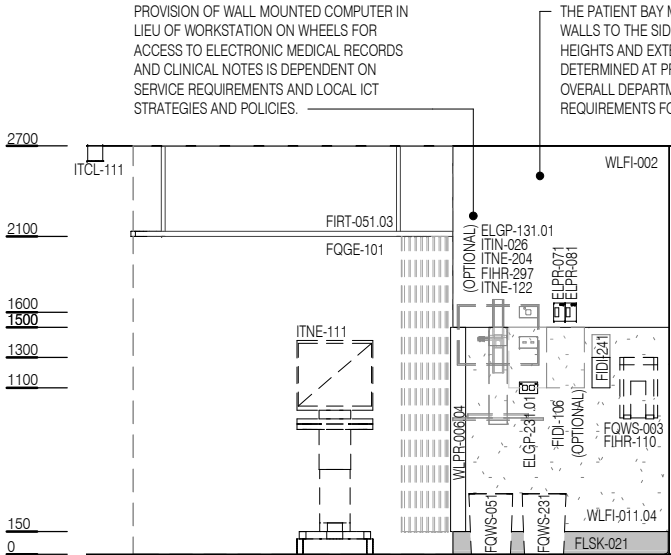| CODE	DESCRIPTION
ITCL-133	BUTTON: patient to staff call, with cancel, with handset connection point, on services panel
ITCL-181	BUTTON: staff assist, with cancel, wall mounted
ITCL-191	BUTTON: emergency, with cancel, wall mounted
ITCL-251	HANDSET: patient to staff call
ITIN-025	OUTLET: data, double RJ45, on services panel
ITIN-026	OUTLET: data, double RJ45, wall mounted
ITNE-111	COMPUTER: workstation on wheels (WOW), medical grade, all-in-one computer, keyboard and mouse, on cart
ITNE-122	COMPUTER: single display screen, all-in-one, medical grade
ITNE-204	INPUT DEVICE: keyboard and mouse, wireless, medical grade, washable
LIFX-111	LIGHT: examination, ceiling recessed
MGAS-022	OUTLET: medical air, on services panel
MGAS-042	OUTLET: oxygen (O2), on services panel
MGAS-062	OUTLET: suction, on services panel
MGFP-021	FLOWMETER: medical air
MGFP-041	FLOWMETER: oxygen
MGFP-061	ADAPTER: suction
MMBE-111	BED: patient, electric, with mattress, emergency
MMGE-191	CANNISTER: suction bottle
MMGE-238	DIAGNOSTIC SET: otoscope, ophthalmoscope and thermometer, wall mounted
MMPM-011	MONITOR: patient, medium acuity
MMSP-051	MEDICAL SERVICES PANEL: wall mounted
WLFI-002	WALL FINISH: paint, clinical areas
WLFI-011.04	WALL FINISH: vinyl, to 1500 AFFL
WLPR-002	WALL PROTECTION: bedhead wall panel, low height
WLPR-006.04	WALL PROTECTION: corner guards, to 1500 AFFL

PROVISION OF WALL MOUNTED COMPUTER IN LIEU OF WORKSTATION ON WHEELS FOR ACCESS TO ELECTRONIC MEDICAL RECORDS AND CLINICAL NOTES IS DEPENDENT ON SERVICE REQUIREMENTS AND LOCAL ICT STRATEGIES AND POLICIES.

THE PATIENT BAY MAY BE CONFIGURED WITH WALLS TO THE SIDES OF THE BAY. INCLUSION, HEIGHTS AND EXTENT OF SIDE WALLS IS TO BE DETERMINED AT PROJECT LEVEL TO SUIT THE OVERALL DEPARTMENT LAYOUT AND REQUIREMENTS FOR PATIENT OBSERVATION.

3300 / 1600 / 3600 / 12 m²

BODY PROTECTED AREA

FLVY-101 FLOOR FINISH: vinyl, seamless, standard slip resistance

1000 MIN CLEAR / 1000 MIN CLEAR
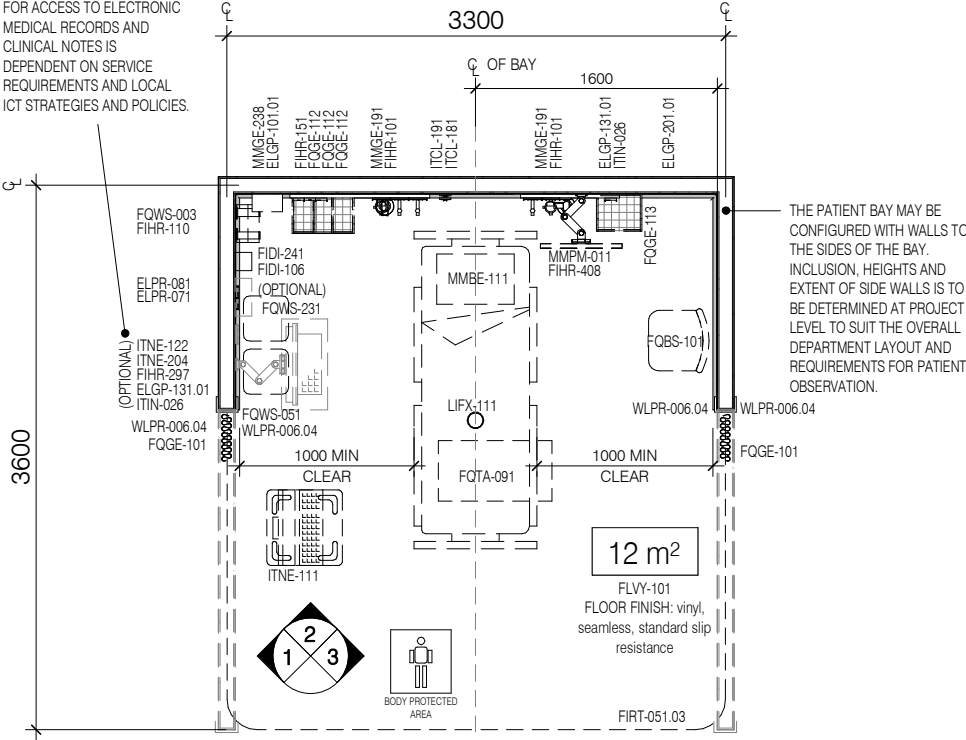
PLAN

LOCATION OF NURSE CALL INDICATOR LIGHT TO BE COORDINATED TO SUIT THE OVERALL DEPARTMENT LAYOUT; PLACEMENT TO ENSURE VISIBILITY ALONG PATHS OF TRAVEL

PROVISION OF WALL MOUNTED COMPUTER IN LIEU OF WORKSTATION ON WHEELS FOR ACCESS TO ELECTRONIC MEDICAL RECORDS AND CLINICAL NOTES IS DEPENDENT ON SERVICE REQUIREMENTS AND LOCAL ICT STRATEGIES AND POLICIES.
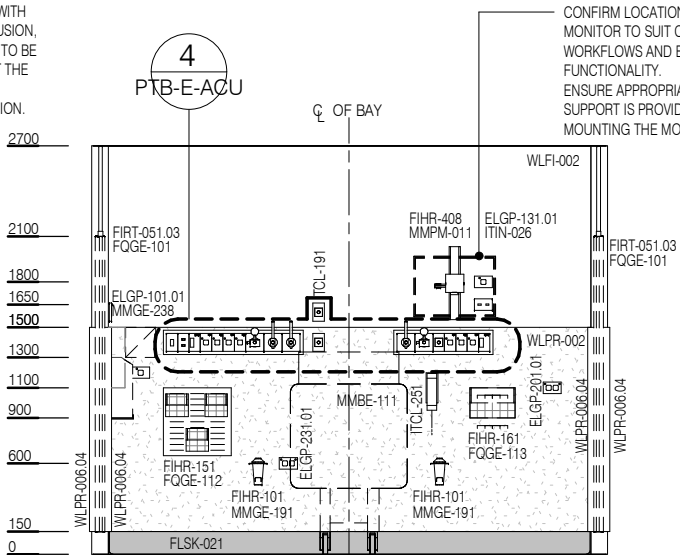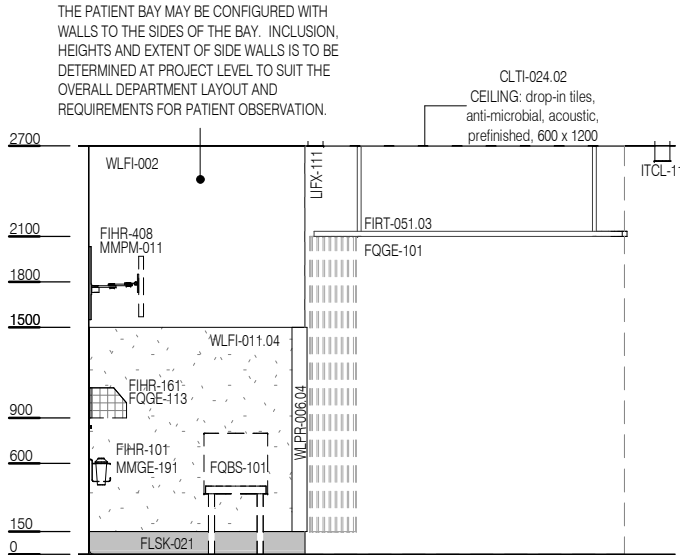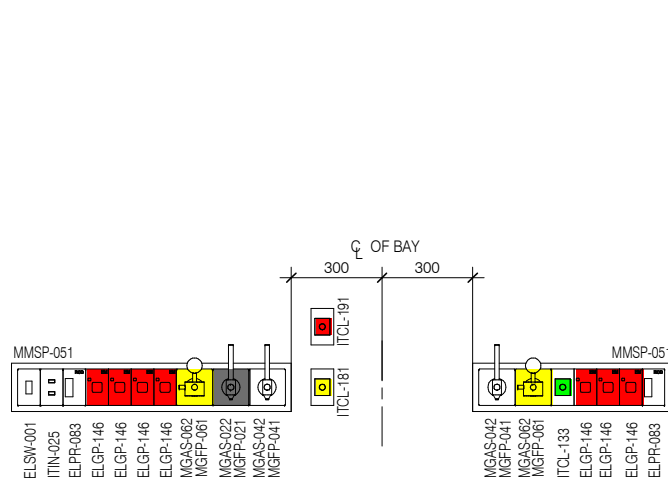
THE PATIENT BAY MAY BE CONFIGURED WITH WALLS TO THE SIDES OF THE BAY. INCLUSION, HEIGHTS AND EXTENT OF SIDE WALLS IS TO BE DETERMINED AT PROJECT LEVEL TO SUIT THE OVERALL DEPARTMENT LAYOUT AND REQUIREMENTS FOR PATIENT OBSERVATION.

CONFIRM LOCATION OF PATIENT MONITOR TO SUIT CLINICAL WORKFLOWS AND EQUIPMENT FUNCTIONALITY. ENSURE APPROPRIATE IN-WALL SUPPORT IS PROVIDED FOR MOUNTING THE MONITOR BRACKET.

CLTI-024.02 CEILING: drop-in tiles, anti-microbial, acoustic, prefinished, 600 x 1200

ELEVATION 1   **ELEVATION 2**   **ELEVATION 3**   **ELEVATION 4** (1 : 25 @ A3)

REV	DESCRIPTION	DATE		SCALE	RLS Room Code	REV
7	GENERAL UPDATE FOLLOWING ERG REVIEW	18/08/2025	FOR GUIDANCE	1 : 50 @ A3	PTB-E-ACU	7

AusHFG
Australasian Health Facility Guidelines
COPYRIGHT 2025
AUSTRALASIAN HEALTH INFRASTRUCTURE ALLIANCE (AHIA)