


AUSTRALASIAN HFG STANDARD COMPONENTS

Room Layout Sheet

RLS Room Code: INTV-MH


Room Name: INTERVIEW ROOM - MENTAL HEALTH

OPTIONAL: NATURAL LIGHT AND EXTERNAL OUTLOOK IS DESIRABLE. CONSIDER PLACEMENT OF WINDOWS AND ROOM ORIENTATION TO SUIT PRIVACY REQUIREMENTS. ALL GLAZING IS TO BE GRADE A SAFETY GLASS TO COMPLY WITH AS/NZS 2208 AND AS1288. TOUGHENED AND LAMINATED GLASS WITH A STRUCTURAL INTERLAYER IS RECOMMENDED. ADDITIONAL REQUIREMENTS FOR GLAZING ARE TO BE CONFIRMED AT PROJECT LEVEL TO SUIT THE SPECIFIC MENTAL HEALTH ENVIRONMENT (ie, NON-ACUTE, ACUTE, INTENSIVE CARE)

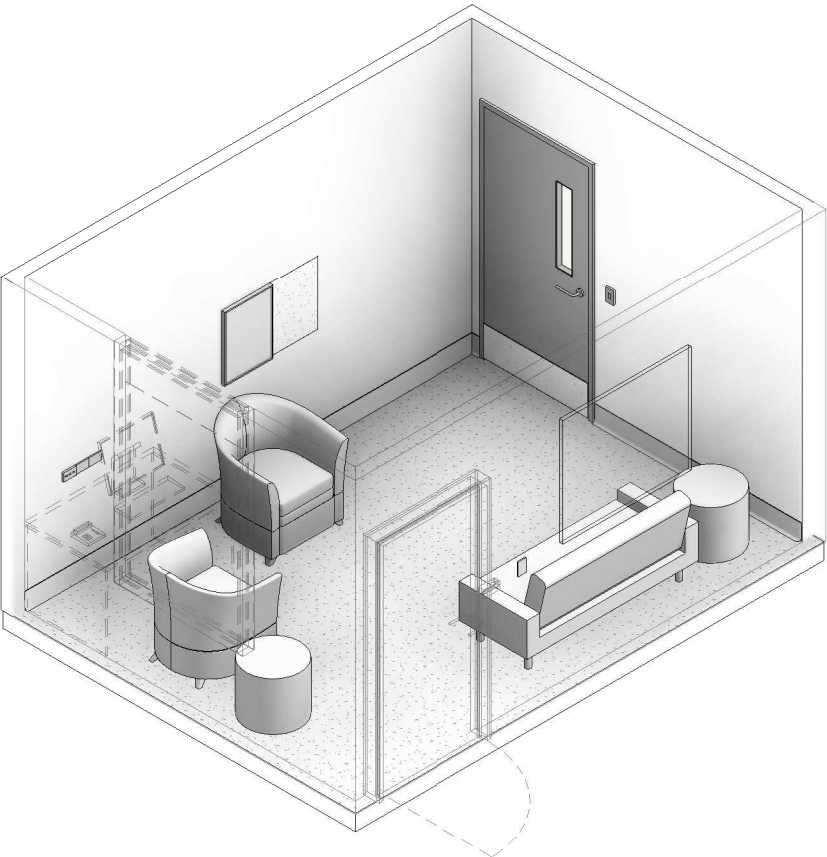


CODE	DESCRIPTION
AFDFI-026	DOOR GLAZING FINISH: vision panel, privacy film
AFDPR-001.01	DOOR PROTECTION: kickplate, to 300 AFFL
AHWCV-001	WINDOW COVERING: blind, roller, single
ELGP-201.01	GPO: double, wall mounted, horizontal
ELSW-001	SWITCH: light
FIBM-020	WHITEBOARD: fixed, magnetic, tamper proof, anti-ligature
FIBM-057	NOTICEBOARD: fixed, fabric covered, tamper proof, anti-ligature
FLCP-006	FLOOR FINISH: carpet tiles
FLSK-026	SKIRTING: vinyl, feather edge
FOBS-111	CHAIR: visitor, mental health
FOBS-352	LOUNGE: 2 seat
FOBS-354	LOUNGE: ottoman
FQDW-104.02	WORKSTATION: straight, fixed height, 720H, 750D x 1200W
FQGE-002	ARTWORK: wall mounted
ITIN-036	OUTLET: data, triple RJ45, wall mounted
ITNE-071	TELEPHONE: handset, desktop
ITNE-101	COMPUTER: single display screen, central processing unit (CPU), keyboard and mouse, desktop
ITSE-061	BUTTON: security, duress, fixed, wall mounted
ITSE-261	READER: security, access control, proximity card, wall mounted
WIFX-156.01	WINDOW: fixed, external, double glazed, sill at 750H
WLFI-002	WALL FINISH: paint, clinical areas

REQUIREMENTS FOR THE SELECTION OF SUITABLE FINISHES, HARDWARE, FIXTURES AND FITTINGS OF THE TYPE MANUFACTURED AND MARKED AS TAMPER PROOF AND ANTI-LIGATURE, INCLUDING ANY WEIGHT LIMITS FOR COLLAPSING/BREAKING STRAIN FOR FIXTURES) MUST BE CONFIRMED AT PROJECT LEVEL BASED ON LOCAL PATIENT SAFETY POLICIES, LOCAL DESIGN GUIDANCE, RISK ASSESSMENTS AND CONFIRMATION OF OPERATIONAL MODELS. ALL TAMPER PROOF AND ANTI-LIGATURE ITEMS MUST BE INSTALLED IN ACCORDANCE WITH THEIR MANUFACTURERS INSTRUCTIONS.

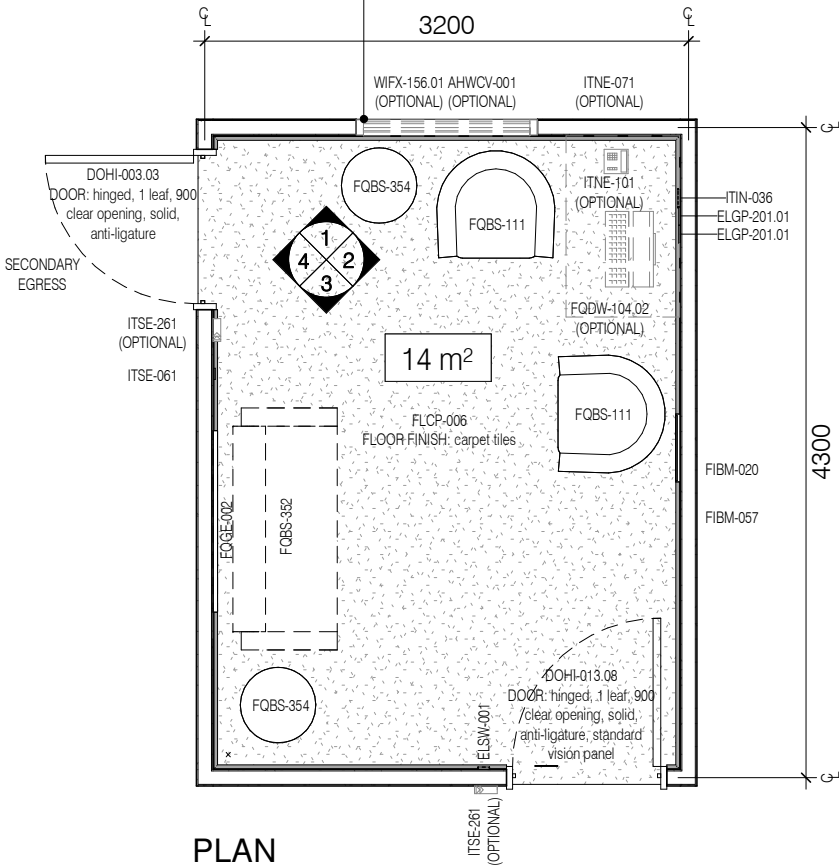


PLAN

OPTIONAL: NATURAL LIGHT AND EXTERNAL OUTLOOK IS DESIRABLE. CONSIDER PLACEMENT OF WINDOWS AND ROOM ORIENTATION TO SUIT PRIVACY REQUIREMENTS. ALL GLAZING IS TO BE GRADE A SAFETY GLASS TO COMPLY WITH AS/NZS 2208 AND AS1288. TOUGHENED AND LAMINATED GLASS WITH A STRUCTURAL INTERLAYER IS RECOMMENDED. ADDITIONAL REQUIREMENTS FOR GLAZING ARE TO BE CONFIRMED AT PROJECT LEVEL TO SUIT THE SPECIFIC MENTAL HEALTH ENVIRONMENT (ie, NON-ACUTE, ACUTE, INTENSIVE CARE)

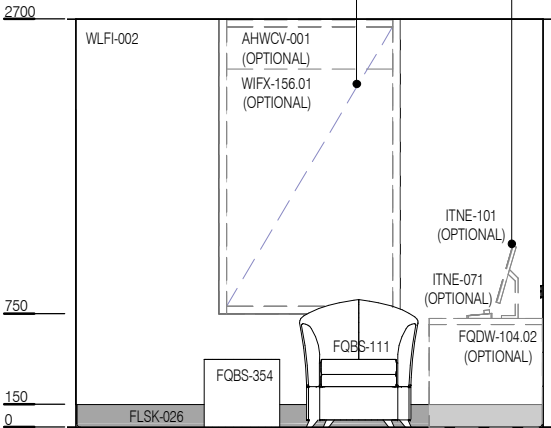

ELEVATION 1


OPTIONAL: PROVISION OF A WORKSTATION IS DEPENDENT ON SERVICE REQUIREMENTS (eg, FOR COMPUTER BASED ASSESSMENTS TO BE UNDERTAKE). IMPACT ON FURNITURE ARRANGEMENT WHEN WORKSTATION IS INCLUDED MUST BE CONSIDERED TO SUPPORT A POSITIVE DYNAMIC BETWEEN STAFF AND CONSUMERS AND ENCOURAGE PARTICIPATION OF CONSUMERS AS EQUAL PARTNERS IN CARE

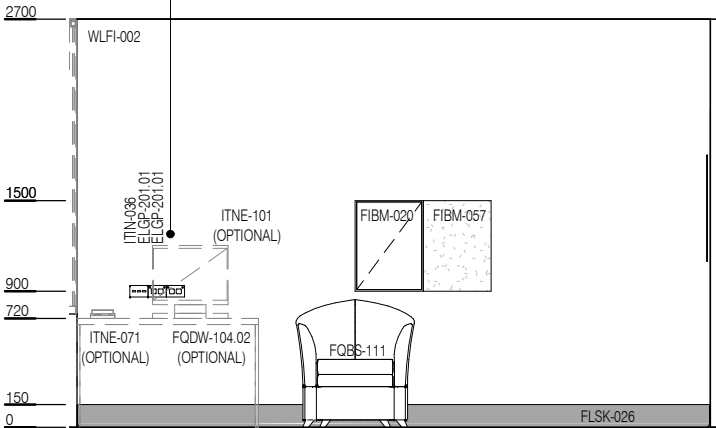

ELEVATION 2


INCLUSION AND SIZE OF VISION PANEL TO BE CONFIRMED TO SUIT SERVICE REQUIREMENTS. PRIVACY FILM MAY BE APPLIED AS REQUIRED

WHERE TAMPER-PROOF AND ANTI-LIGATURE FINISH IS REQUIRED, FLUSH SET CEILING TO BE PROVIDED

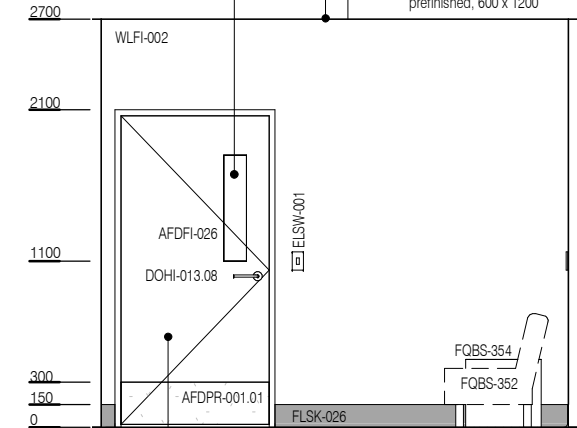

ELEVATION 3

IT IS RECOMMENDED THAT THE DOOR SET IS SELECTED AS A FULL ASSEMBLY TO ENSURE THE LEAF, FRAME AND HARDWARE ARE COORDINATED AND MEET ALL TAMPER-PROOF AND ANTI-BARRICADE REQUIREMENTS WHEN USED TOGETHER

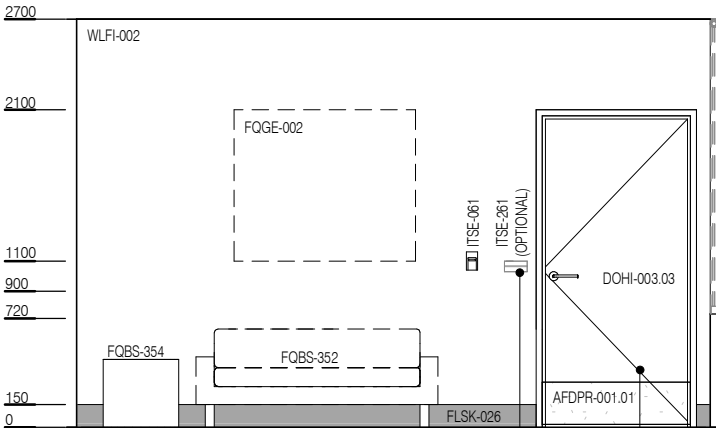

ELEVATION 4

OPTIONAL: PROVISION TO SUIT SECURITY AND EGRESS REQUIREMENTS